

DIFFERENTIAL SKID PLATE



Material: aluminum / steel

Part number: 2333.9527.2.6; 2333.9527.2.6.Black; 2111.9527.2.3

READ BEFORE INSTALLATION

CAUTION!

To reduce the risk of serious injury or damage to property: before you start installing and using this product, read the full instructions, pay special attention to the conditions of safe use and recommendations for installation! When installing or maintaining this product, it is necessary to use protective goggles. Check the integrity of the installed components and torque all hardware every 250 miles (400 kms). Discontinue use if there is any damage to the structure or fasteners!

NOTICE

Skid plates are supplemental protection. We cannot guarantee protection against all possible damage from impacts. When driving, be careful of objects and terrain that may damage sensitive parts of the vehicle.

SAFETY NOTICE

- The RIVAL skid plate is designed to complement the use and design of the specified vehicle under conditions underlined by the vehicle manufacturer.
- While driving the vehicle at any speed, collision with another vehicle, animal or object must always be avoided.
- Following any collision with another vehicle, animal or object, the RIVAL skid plate and the vehicle must be inspected by a specialized or suitably qualified vehicle technician for possible damage to the components and assemblies in order to confirm suitability for further use of the vehicle.
- It is strongly recommended that you do not operate a vehicle with a damaged skid plate or its components. In the case of damage, please contact the nearest RIVAL dealer. A damaged vehicle or skid plate is extremely dangerous and should be avoided at all cost.
- If applicable, we recommend using a funnel when changing the oil to prevent spills and ensure a clean process.

INSTALLATION NOTICE

- The RIVAL skid plate must be mounted to the vehicle according to this installation manual.
- Personal safety during the installation process must be adhered to at all times.
- Do not install this skid plate on vehicle models other than those listed in this manual.
- We recommend using blue threadlocker on all hardware.
- Estimated time for installation: 1 hour.

Required tools

Basic tool kit
Torque wrench

Torque setting

M8 - 24 Nm (17.7 lb/ft)
M10 - 30 N·m (22.1 lb/ft)

VEHICLE COMPATIBILITY




Toyota Hilux 2.7, 2.4TD, 2.8TD; AT, MT; 4WD (2015-2025) except GR Sport









Toyota Hilux 2.8D 48V; AT; 4WD (2025-present)

PARTS LISTING

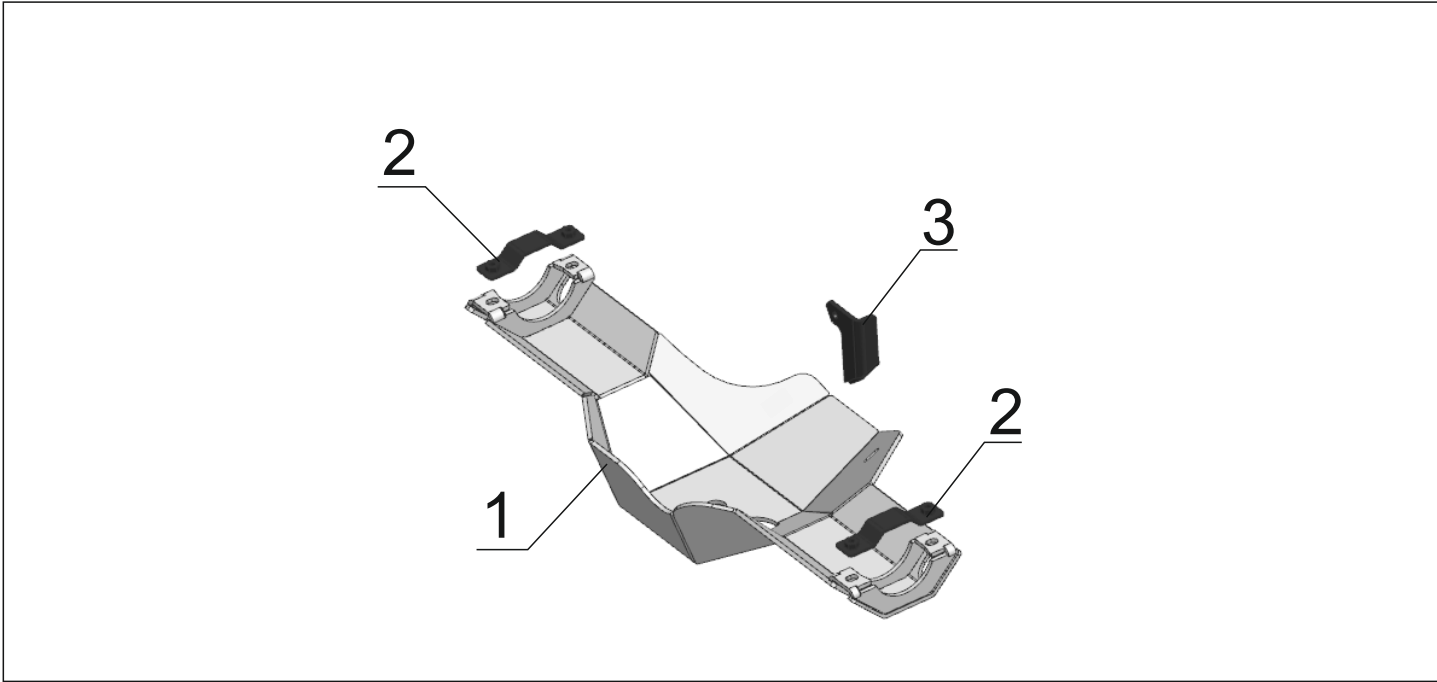

1	Differential skid plate
2	Side bracket
3	Middle bracket

A		Bolt M10x1.5x70	4
B		Bolt M10x1.5x30	1
C		Washer M10	4
D		Spring washer M10	4
E		Penny washer M10	1
F		Washer M8	1


G		Bolt M8x1.25x20	1
H		Spacer 40 mm	4
I		Spacer 30 mm	4

INSTALLATION PROCEDURE



***If equipped, remove factory or any aftermarket skid plates that might interfere with installation.**

Fig. 1

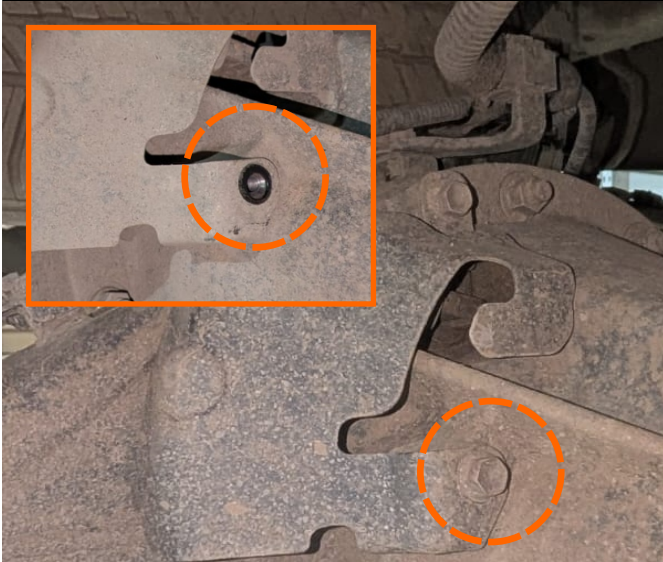

1. Unscrew factory bolt as shown in fig.1.

Fig. 2



2. Secure Middle bracket (item 3) using bolt M8x20 and washer M8 (items G,F) into threaded hole as shown in fig. 2.


***Do not tighten yet.**

Fig. 3



3. Install the side brackets (item 2) as shown in fig. 3 and fig. 4.

Fig. 4

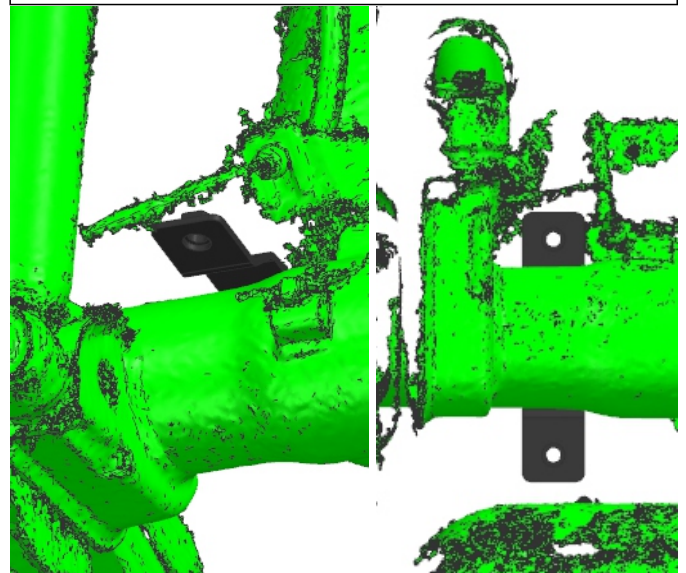

INSTALLATION PROCEDURE

Toyota Hilux 2.7, 2.4TD, 2.8TD; AT, MT; 4WD (2015-2025) except GR Sport

Fig. 5


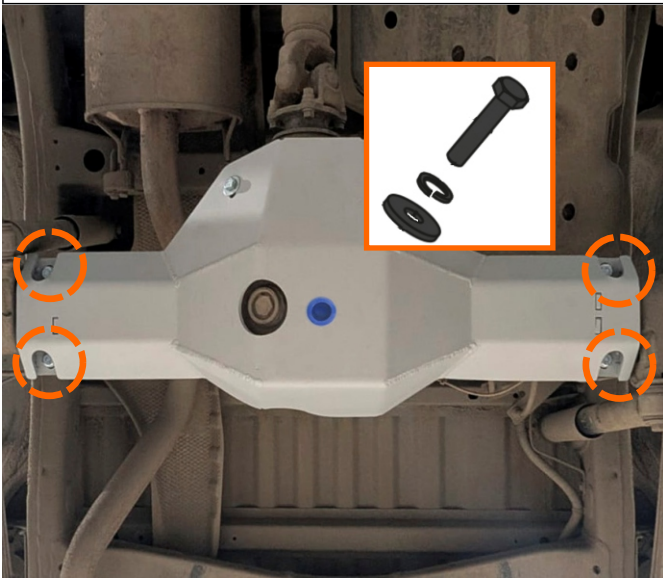


Fig. 6

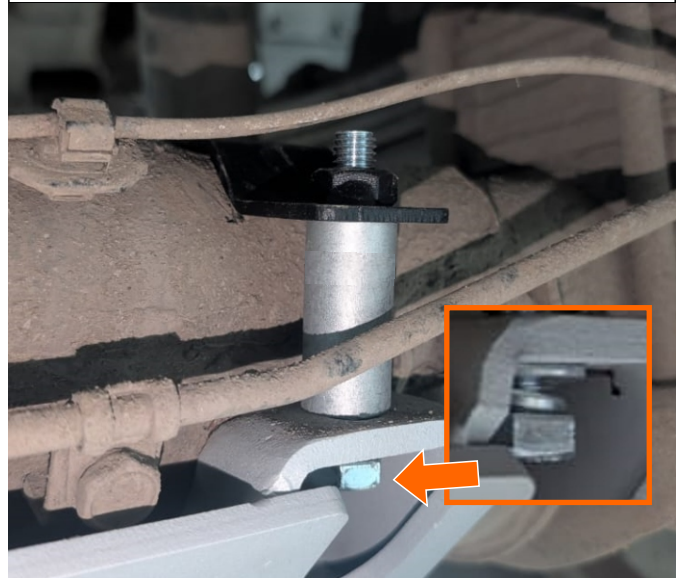


4. Secure the differential skid plate (item 1) using bolts M10x1.5x70, washers M10, spring washers M10 and spacers 40 mm (items A, C, D, H) as shown in fig. 5 and fig. 6.

***Repeat for right and left sides of vehicle.**

****Do not tighten yet.**

Fig. 7

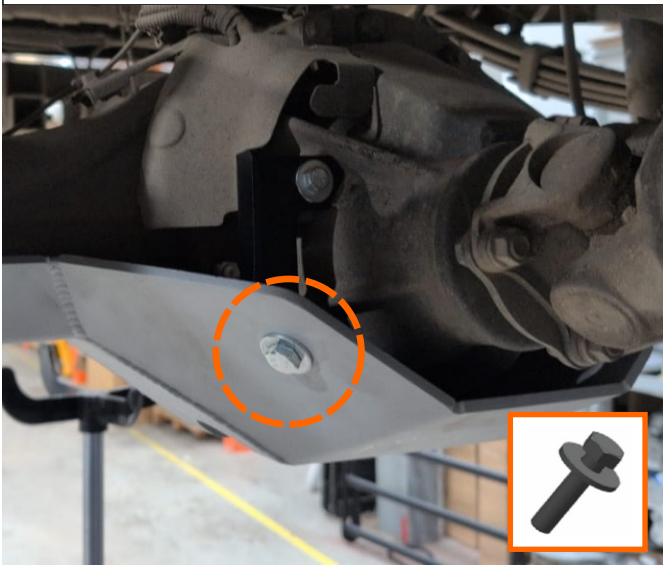

5. Secure front part of skid plate using bolt M10x30 and penny washer M10 (items B, E) as shown in fig. 7.

***Once all bolts are inserted, check skid plate alignment and tighten all previously installed hardware.**

INSTALLATION PROCEDURE

Toyota Hilux 2.8D 48V; AT; 4WD (2025-present)

Fig. 8


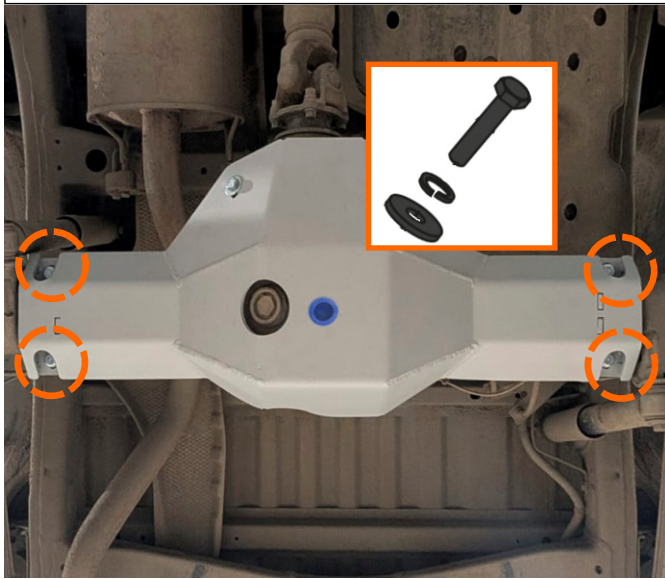


Fig. 9

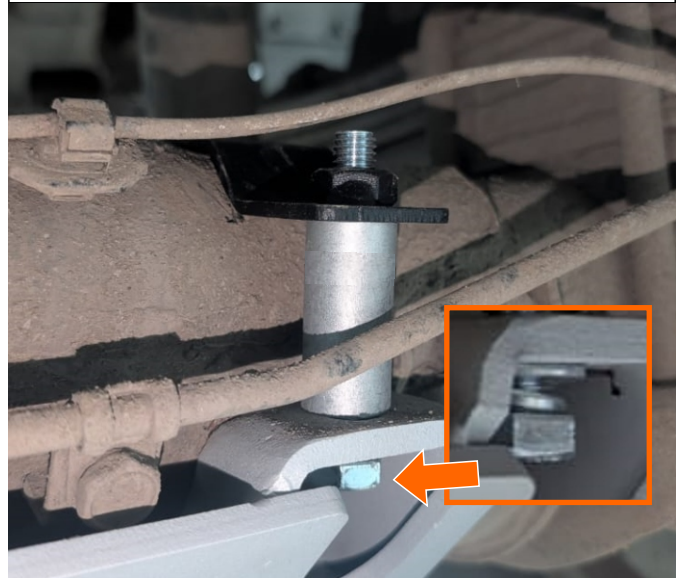


6. Secure the differential skid plate (item 1) using bolts M10x1.5x70, washers M10, spring washers M10 and spacers 30 mm (items A, C, D, I) as shown in fig. 8 and fig. 9.

***Repeat for right and left sides of vehicle.**

****Do not tighten yet.**

Fig. 10

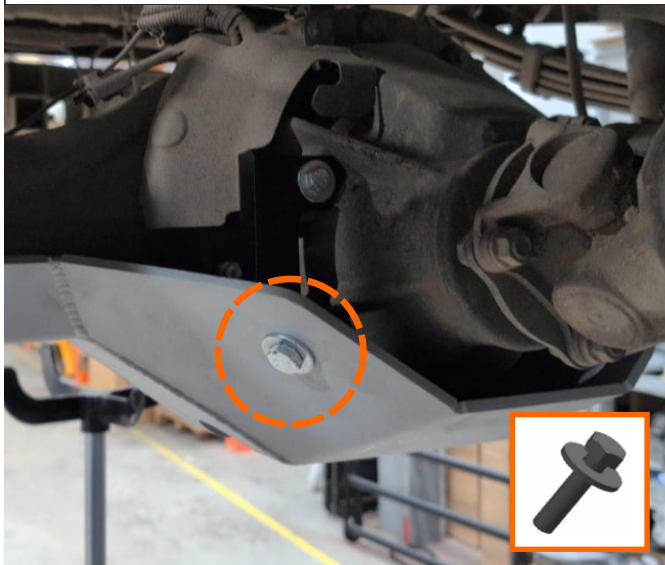

7. Secure front part of skid plate using bolt M10x30 and penny washer M10 (items B, E) as shown in fig. 10.

***Once all bolts are inserted, check skid plate alignment and tighten all previously installed hardware.**

INSTALLATION PROCEDURE



Before operating a vehicle fitted with RIVAL skid plates:

- **Make sure all fittings are properly torqued.**
- **Ensure the integrity of the structure and its components.**