
No.: 4114.1.6 Engine block; 4115.1.6 Steering rods

4116.1.6 Gearbox; 4117.1.6 Transfer case

Year: 2016-Engine: 3.0; 4.8 Transmission: MANUAL

FITTING KIT

1. Bolt M8x25	19 pc
2. Nut M8	2 pc
3. Washer 8	21 pc
4. Spring washer 8	2 pc

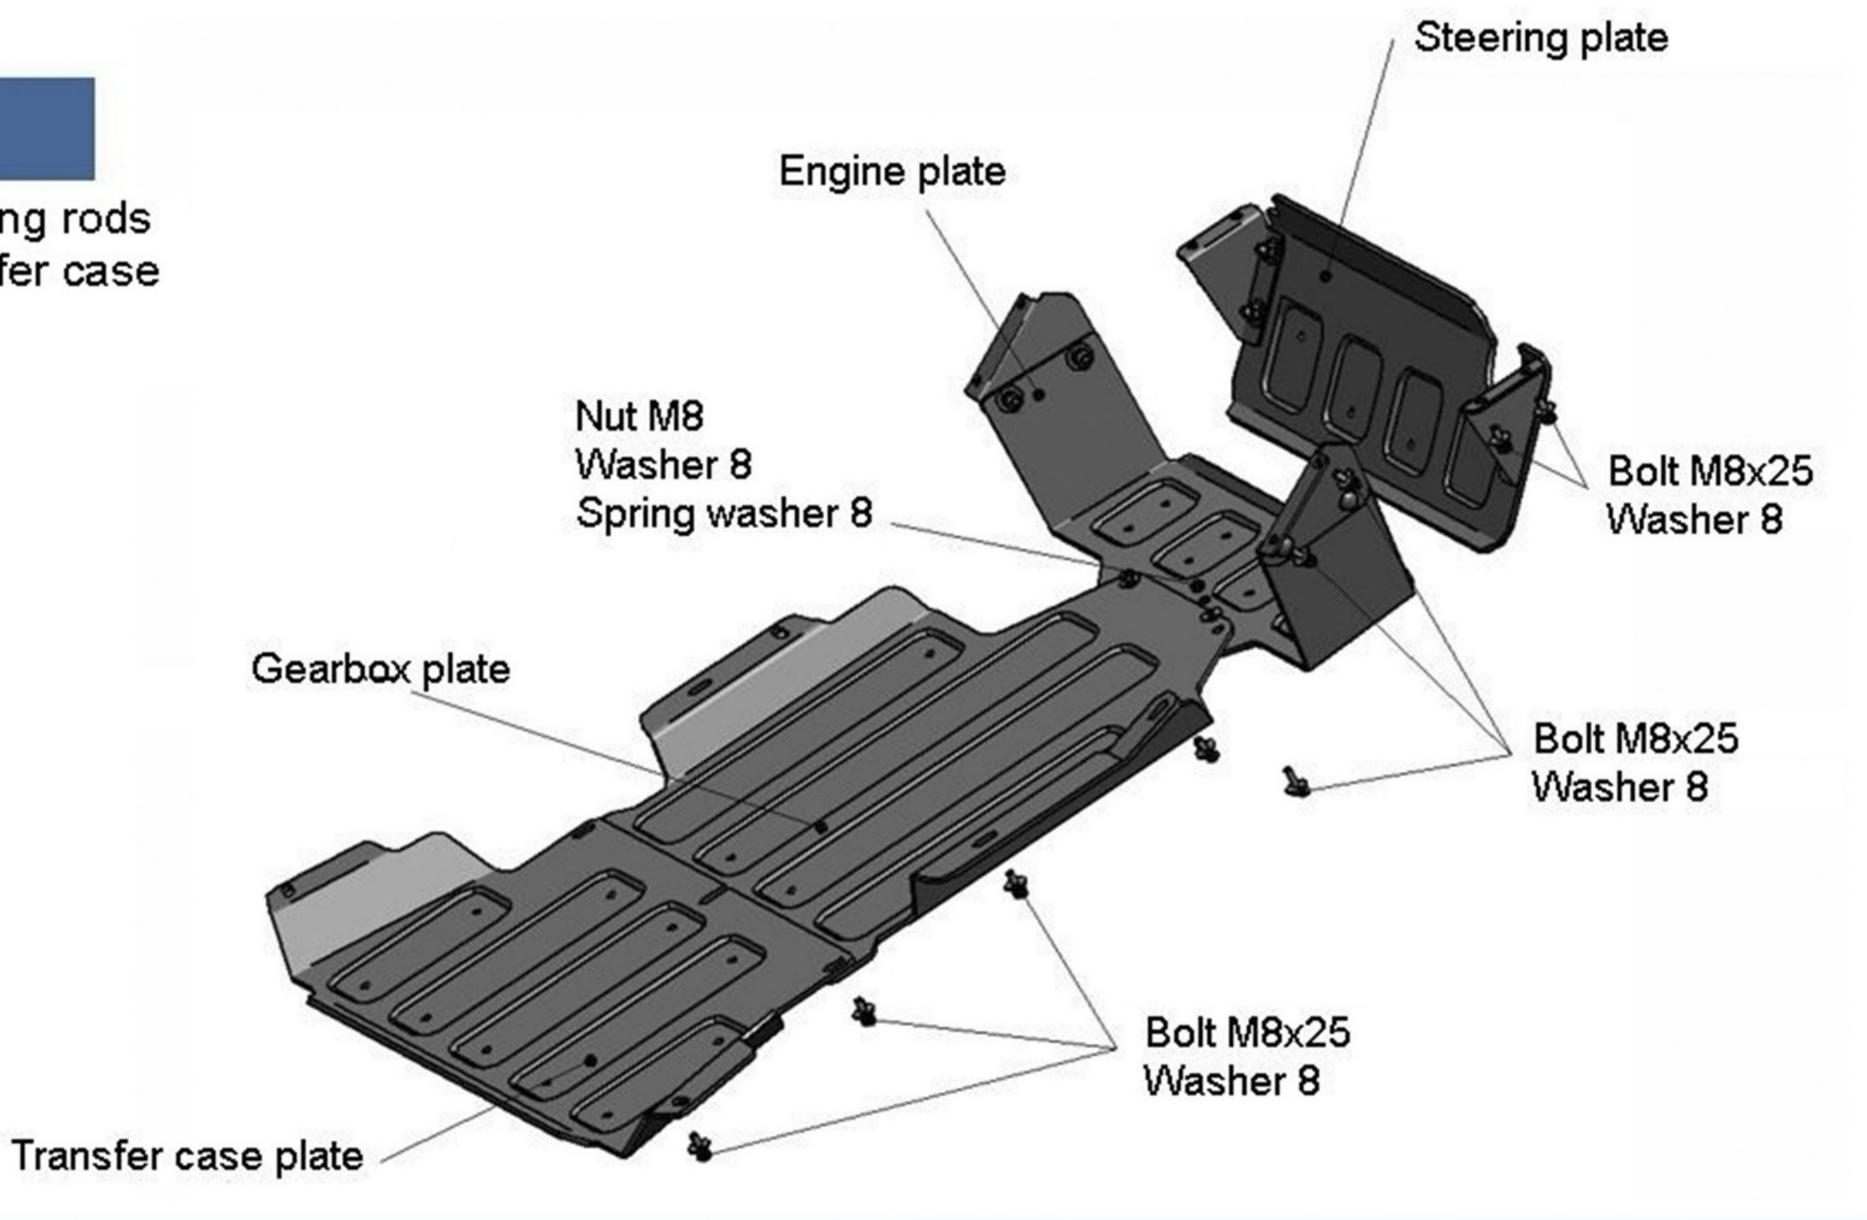

- 1. Remove OE guards.
- 2. Mount skid plates to OE fitting points with bolts M8x25.
- 3. Connect engine plate with gearbox plate by bolts M8x25 and nuts M8.
- 4. Tighten all screws (50 Nm for M10, 30 Nm for M8, 10 Nm for M6). Do not use pneumatic or power tools to tighten.




No.: 4114.1.6 Engine block; 4115.1.6 Steering rods

4116.1.6 Gearbox; 4117.1.6 Transfer case

Year: 2016-Engine: 3.0; 4.8 Transmission: MANUAL

FITTING KIT

1. Bolt M8x25	19 pc
2. Nut M8	2 pc
3. Washer 8	21 pc
4. Spring washer 8	2 pc

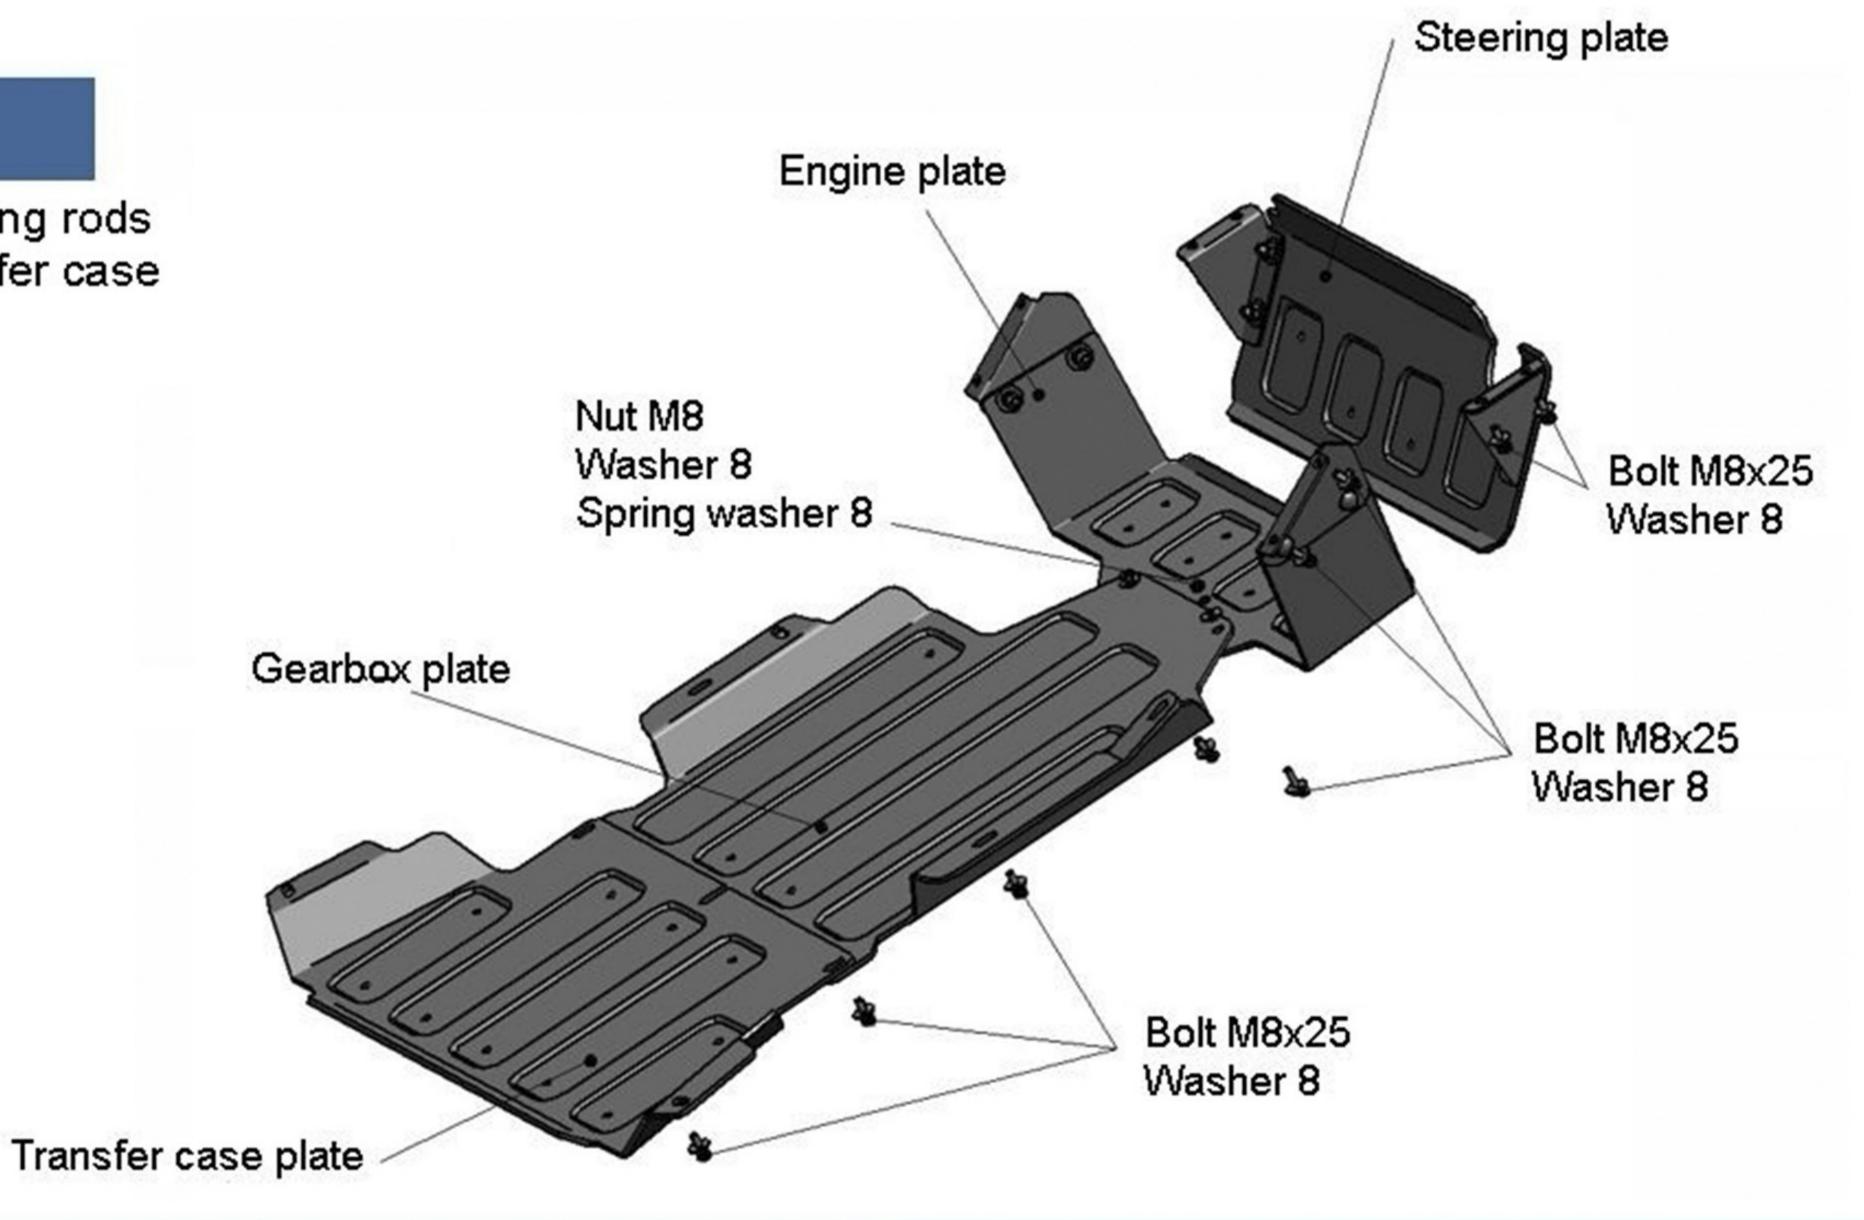

- 1. Remove OE guards.
- 2. Mount skid plates to OE fitting points with bolts M8x25.
- 3. Connect engine plate with gearbox plate by bolts M8x25 and nuts M8.
- 4. Tighten all screws (50 Nm for M10, 30 Nm for M8, 10 Nm for M6). Do not use pneumatic or power tools to tighten.




No.: 4114.1.6 Engine block; 4115.1.6 Steering rods

4116.1.6 Gearbox; 4117.1.6 Transfer case

Year: 2016-Engine: 3.0; 4.8 Transmission: MANUAL

FITTING KIT

1. Bolt M8x25	19 pc
2. Nut M8	2 pc
3. Washer 8	21 pc
4. Spring washer 8	2 pc

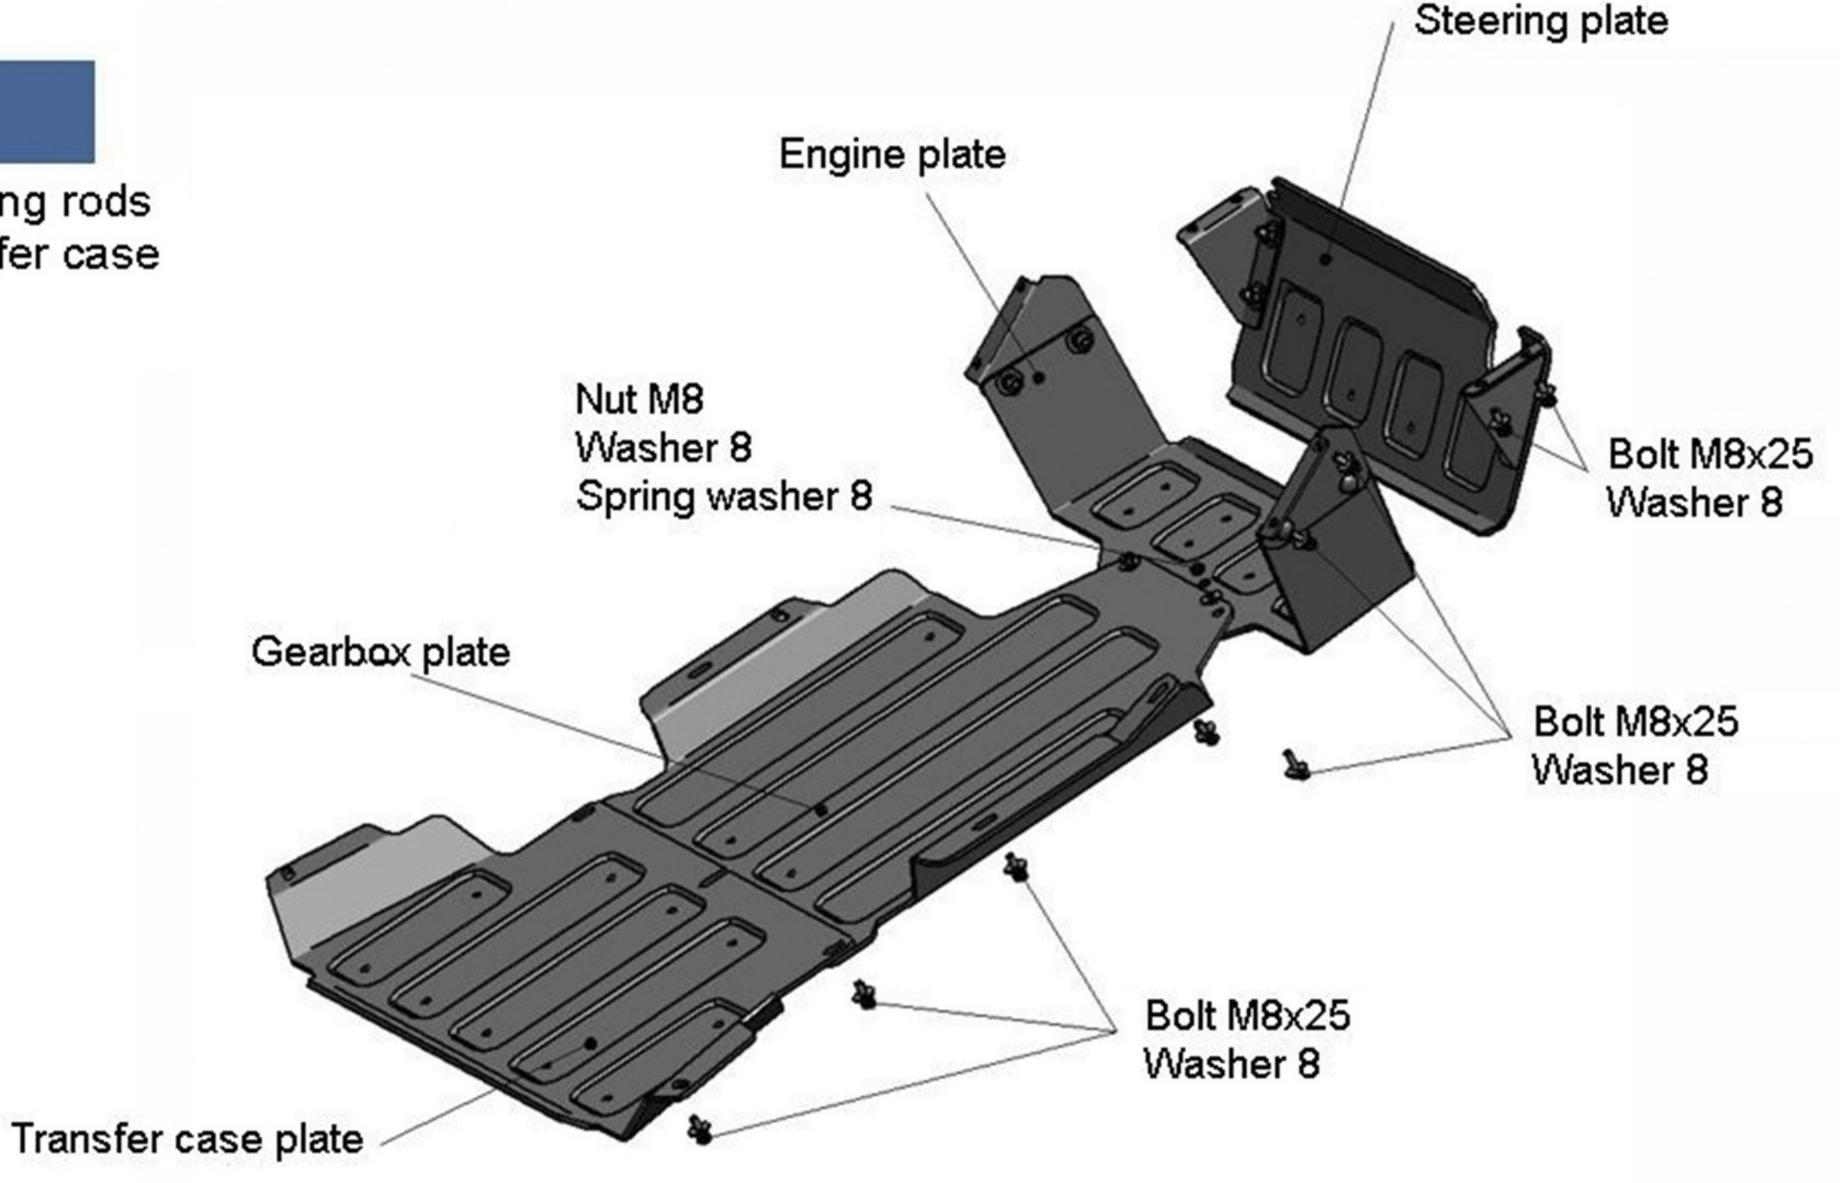

- 1. Remove OE guards.
- 2. Mount skid plates to OE fitting points with bolts M8x25.
- 3. Connect engine plate with gearbox plate by bolts M8x25 and nuts M8.
- 4. Tighten all screws (50 Nm for M10, 30 Nm for M8, 10 Nm for M6). Do not use pneumatic or power tools to tighten.




No.: 4114.1.6 Engine block; 4115.1.6 Steering rods

4116.1.6 Gearbox; 4117.1.6 Transfer case

Year: 2016-Engine: 3.0; 4.8 Transmission: MANUAL

FITTING KIT

1. Bolt M8x25	19 pc
2. Nut M8	2 pc
3. Washer 8	21 pc
4. Spring washer 8	2 pc

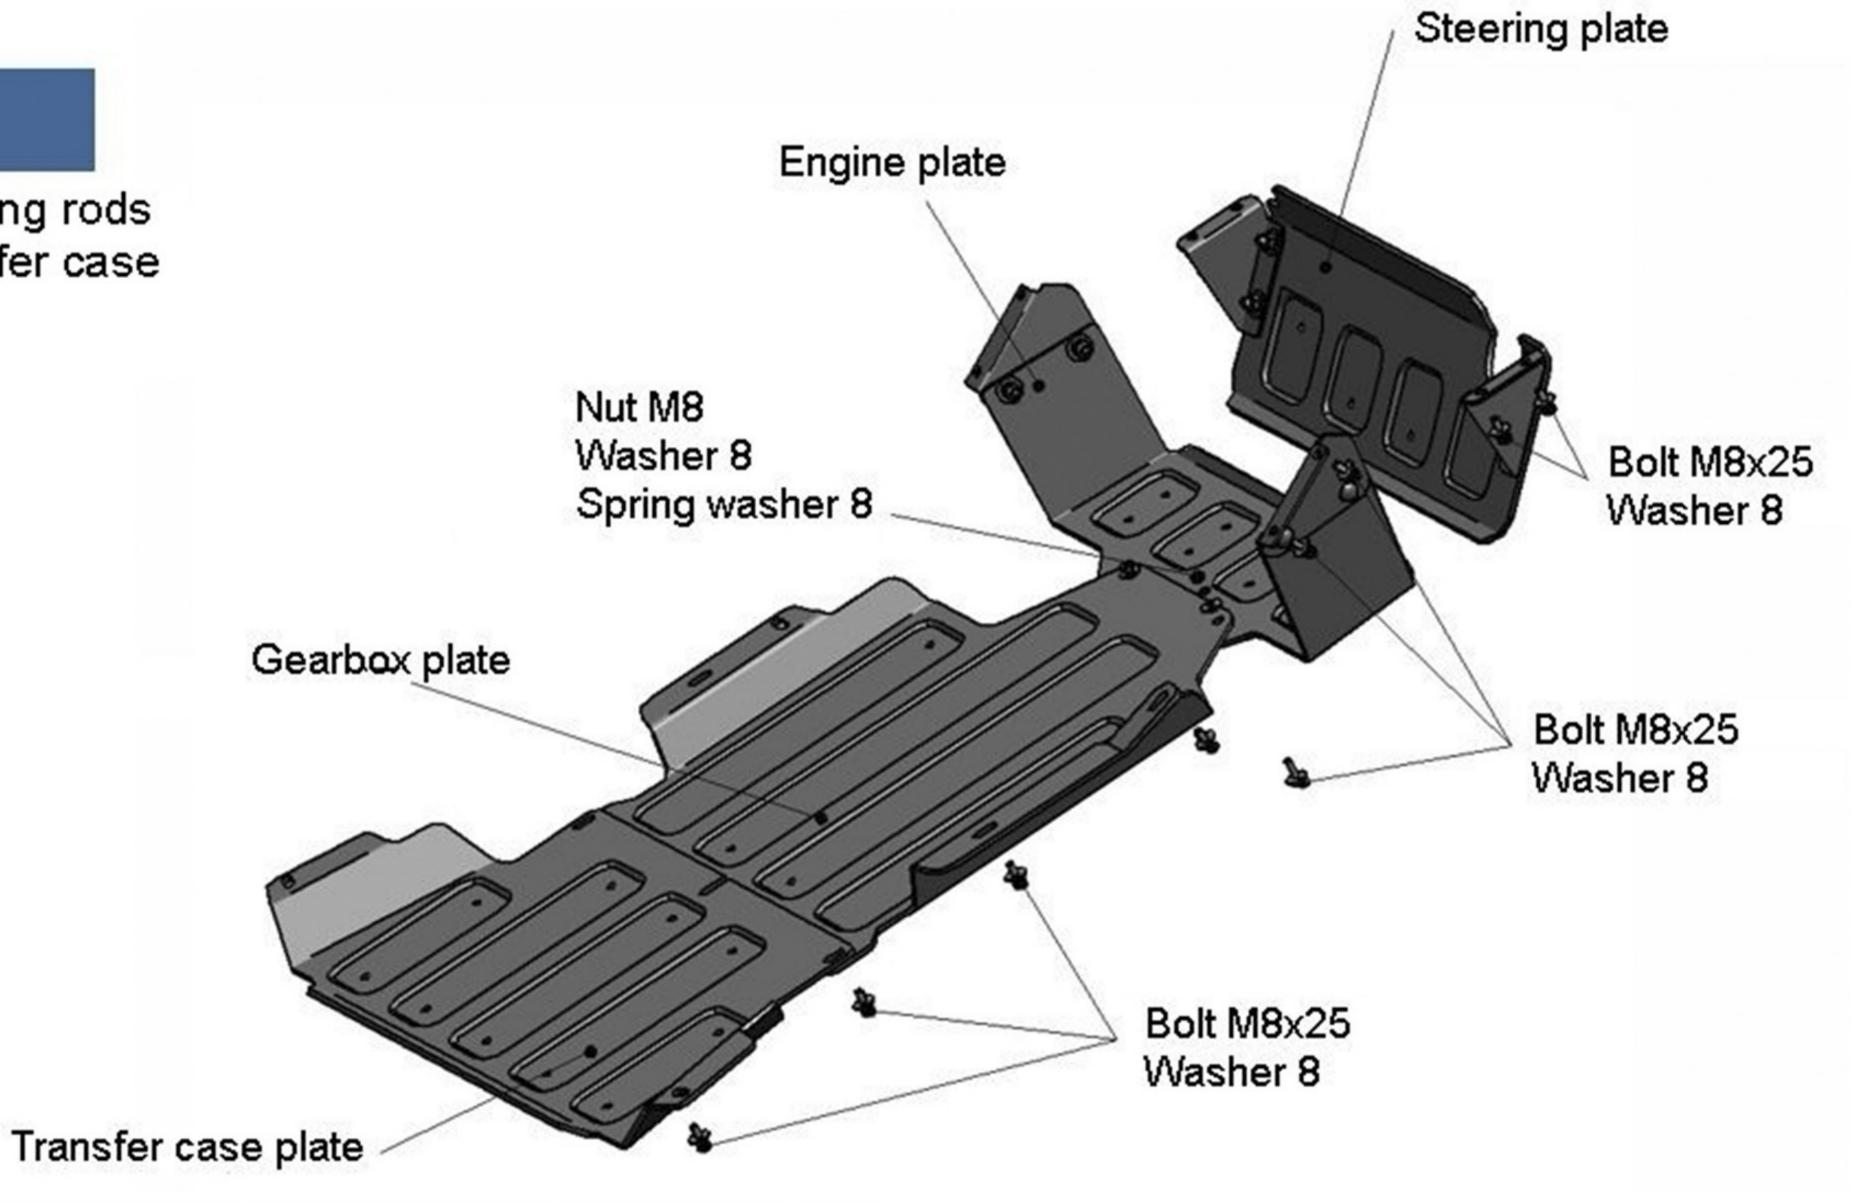

- 1. Remove OE guards.
- 2. Mount skid plates to OE fitting points with bolts M8x25.
- 3. Connect engine plate with gearbox plate by bolts M8x25 and nuts M8.
- 4. Tighten all screws (50 Nm for M10, 30 Nm for M8, 10 Nm for M6). Do not use pneumatic or power tools to tighten.

